




Reference dimensions for Jason belts

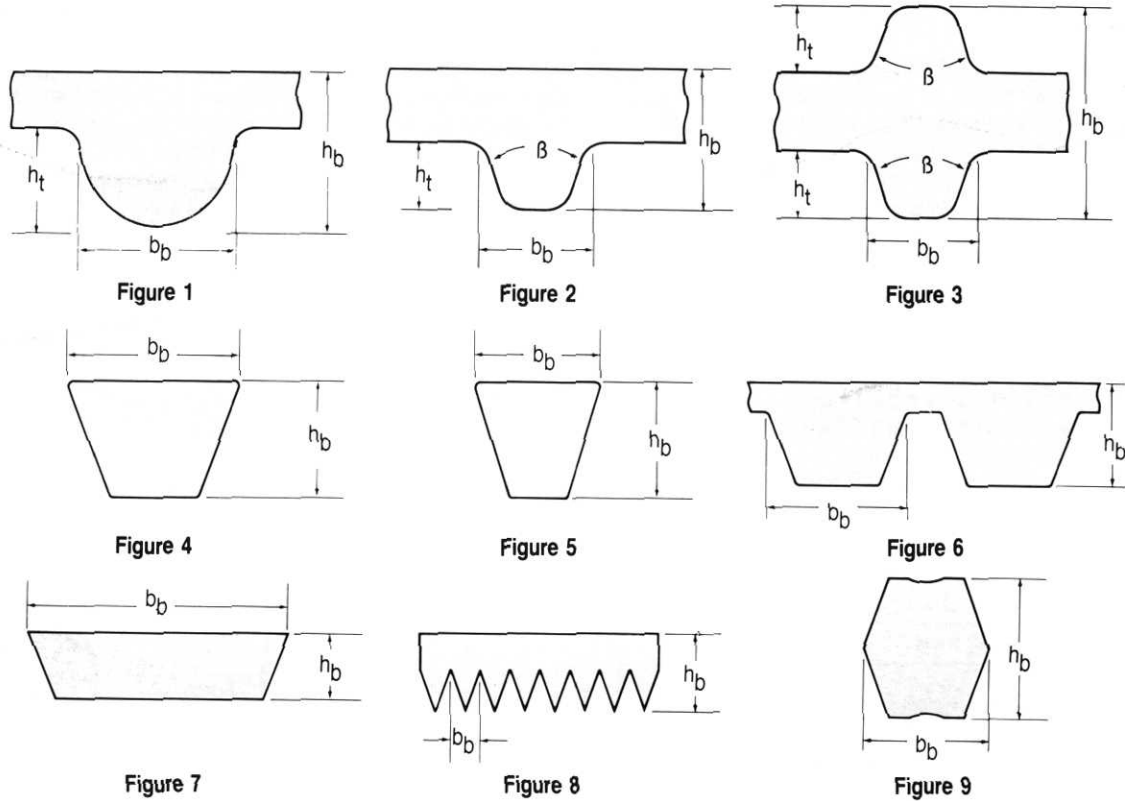

| Belt Section (Pitch) | Figure | β (Angle) | b_b (Width) | h_b (Height) | h_t |
|----------------------|--------|-----------------|---------------|----------------|---------|
| 5M (5mm) | 1 | - | .114-in | .150-in | .082-in |
| 8M (8mm) | 1 | - | .197-in | .236-in | .133-in |
| 14M (14mm) | 1 | - | .346-in | .394-in | .237-in |
| MXL (.080-in.) | 2 | 40° | 0.45-in | .045-in | .020-in |
| XL (.200-in.) | 2 | 50° | .101-in | .090-in | .050-in |
| L (.375-in.) | 2 | 40° | .183-in | .140-in | .075-in |
| H (.500-in.) | 2 | 40° | .241-in | .160-in | .090-in |
| XH (.875-in.) | 2 | 40° | .495-in | .440-in | .250-in |
| XXH (1.25-in.) | 2 | 40° | .750-in | .620-in | .375-in |
| T5 (5mm) | 2 | 40° | 1.88mm | 2.2mm | 1.2mm |
| T10 (10mm) | 2 | 40° | 3.5mm | 4.5mm | 2.5mm |
| DXL (.200-in.) | 3 | 50° | .101-in | .120-in | .050-in |
| DL (.375-in.) | 3 | 40° | .183-in | .180-in | .075-in |
| DH (.500-in.) | 3 | 40° | .241-in | .231-in | .090-in |
| 2L | 4 | *40° | .25-in | .16-in | - |
| 3L | 4 | *40° | .38-in | .22-in | - |
| 4L | 4 | *40° | .50-in | .31-in | - |
| 5L | 4 | *40° | .66-in | .38-in | - |
| A, AX | 4 | *40° | .50-in | .31-in | - |
| B, BX | 4 | *40° | .66-in | .41-in | - |
| C, CX | 4 | *40° | .88-in | .53-in | - |
| D | 4 | *40° | 1.25-in | .75-in | - |
| E | 4 | *40° | 1.50-in | 1.00-in | - |

| Belt Section (Pitch) | Figure | β (Angle) | b_b (Width) | h_b (Height) | h_t |
|----------------------|--------|-----------------|---------------|----------------|-------|
| SPZ | 5 | *38° | 9.7mm | 8mm | - |
| SPA | 5 | *38° | 12.7mm | 10mm | - |
| SPB | 5 | *38° | 16.3mm | 13mm | - |
| SPC | 5 | *38° | 22.0mm | 18mm | - |
| 3V, VX | 5 | *38° | .38-in | .31-in | - |
| 5V, VX | 5 | *38° | .62-in | .53-in | - |
| 8V | 5 | *38° | 1.00-in | .88-in | - |
| RB | 6 | *40° | .66-in | .50-in | - |
| RC | 6 | *40° | .88-in | .66-in | - |
| RD | 6 | *40° | 1.25-in | .84-in | - |
| R3V | 6 | *38° | .38-in | .38-in | - |
| R5V | 6 | *38° | .62-in | .62-in | - |
| R8V | 6 | *38° | 1.00-in | 1.00-in | - |
| 1422V | 7 | *22° | .38-in | .31-in | - |
| 1922V | 7 | *22° | 1.19-in | .38-in | - |
| 2322V | 7 | *22° | 1.44-in | .44-in | - |
| 1926V | 7 | *26° | 1.19-in | .44-in | - |
| 2926V | 7 | *26° | 1.81-in | .50-in | - |
| 3226V | 7 | *26° | 2.00-in | .53-in | - |
| 2530V | 7 | *30° | 1.06-in | .59-in | - |
| 3230V | 7 | *30° | 2.00-in | .62-in | - |
| 4430V | 7 | *30° | 2.75-in | .69-in | - |
| 4036V | 7 | *36° | 2.50-in | .69-in | - |
| 4436V | 7 | *36° | 2.75-in | .72-in | - |
| 4836V | 7 | *36° | 3.00-in | .75-in | - |
| J | 8 | - | .092-in | .16-in | - |
| L | 8 | - | .185-in | .38-in | - |
| M | 8 | - | .370-in | .66-in | - |
| AA | 9 | *40° | .50-in | .41-in | - |
| BB | 9 | *40° | .66-in | .53-in | - |
| CC | 9 | *40° | .88-in | .69-in | - |
| DD | 9 | *40° | 1.25-in | 1.00-in | - |

* V-belt angles are sheave angles